COMPANICS
Communication & Electronics LTD

כומפניקס תקשורת ואלקטרוניקה בע"מ
הבורסקאי 1 א.ת. סגולה, פ"ת | ספק מ. הביטחון: 83524121 | ח.פ: 512109968
sales@companics.co.il | www.companics.co.il | טל' / 03-9049004

מדריך התקנה — משפחת לחצני ניפוץ ירוקים


מק"ט 14030A — כולל את הגרסאות 12844, 12842 ו-12845

תוכן עניינים


- 12844 — גרסה רגילה (מפסק דו-קוטבי DPDT): עמוד 2
- 12842 — גרסה כוללת תאורה ובאזר: עמודים 3–4
- 12845 — גרסה חיצונית IP67: אין הוראות התקנה זמינות כמסמך נפרד; הוראות ההרכבה (קופסה אחורית אטומה נקבעת לקיר בשלושה ברגים, החזית ננעלת עליה ב-4 ברגי מכסה, הכבל נכנס מלמעלה) מודפסות בגיליון המפרט הטכני של 14030A

לפני ההתקנה יש לוודא את זהות הגרסה לפי הצילום והמידות בגיליון המפרט הטכני.

INSTALLATION INSTRUCTIONS FOR THE MANUAL CALL POINT

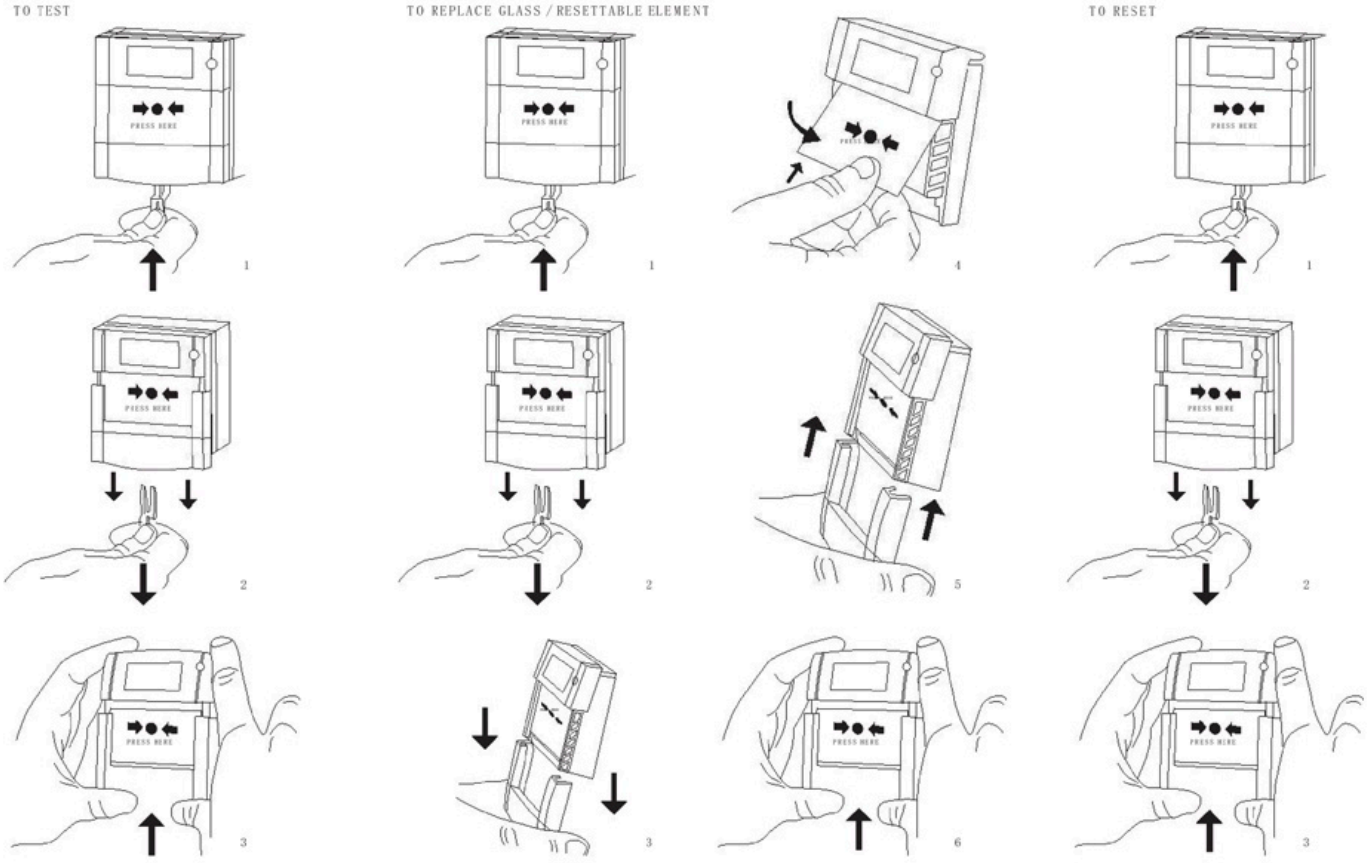


INSTALLATION INSTRUCTIONS FOR THE MANUAL CALL POINT

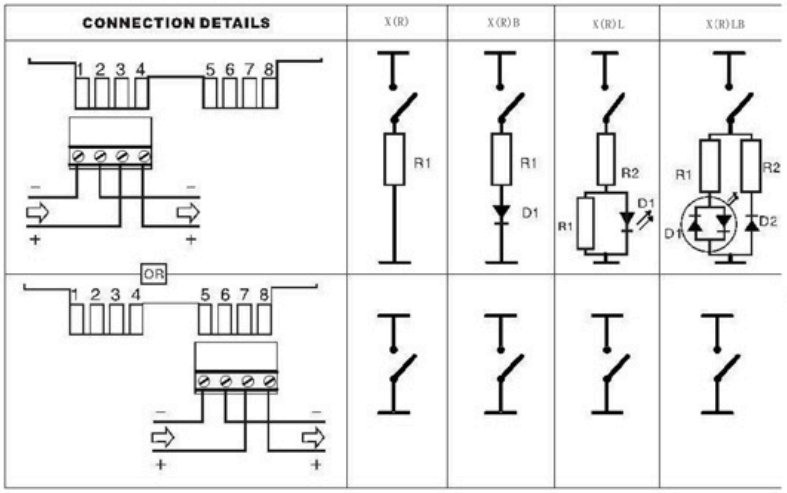

The code designed to help in the selection of correct unit. The code means as below:


X—COLOR
(R)— RESISTANCE
B—DIODE
L—LED
LB—LED&DIODE
S—SINGLE POLE
D—DOUBLE POLE


E. G:

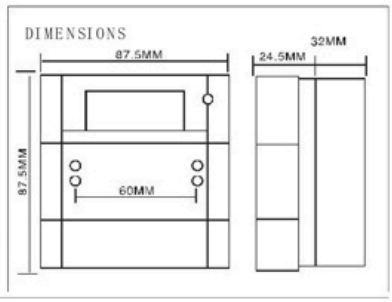

PUSH FIT CONNECTOR

After wiring the terminal connector, plug into the appropriate position, see connection details (left).

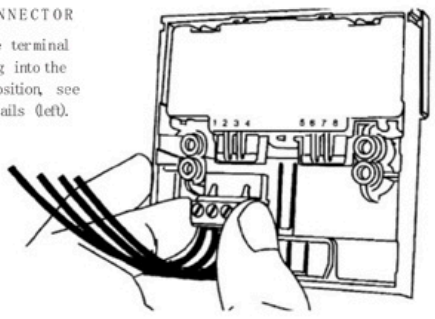

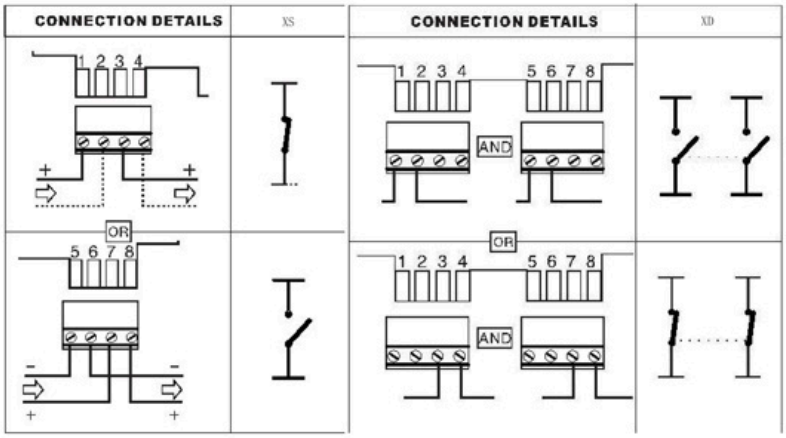

TECHNICAL DATA

- 30VDC Max
- 2A Max
- IP24D
- 110/160g
- -30 C to 70 C

Important Notes: Please do not over tighten fixing screws. The use of lubricants, cleaning solvents or petroleum based products should be avoided.

Resetable Switch Call Point Installation Manual

※Features

1. Case has a variety of colors to select.
2. Resetable design, obvious indicators around the edges of the unit.
3. Press the pressing plate to enable the output function.
4. Pressing plate with status shown.
5. Reversionary key with non-slip design.
6. Built-in buzzer status to set as silent, interval wailing or continuous wailing. Volume is adjustable.
7. Input power range from DC12-24V (depending on the model) to connect with all types of fire alarm system.
8. Easy to assemble, outer case without screws, 3 set of output points to connect other equipment, embedded or surface installations to select.

※Accessories



Emergency switch x1



Key x1




M3x16 Screws x2


※Specifications

Item		Note
Power supply	DC 12V~DC 24V	± 10%
Operation current	DC 12V/10mA(Standby)/50mA(Operation) DC 24V/11mA(Standby)/64mA(Operation)	± 10%
Buzzer	Set as silent, interval wailing or continuous wailing	
Indicator	Dual-color (red and green) . Red indicator to set blinking , off or on.	
Output	N.O.、N.C.& COM.Output (Maximum load of 125V/3A)	
Weight	192g / 208g	
Dimensions	90mm(L)x93mm(W)x45mm(H)	
Material	ABS, PC(transparent part)	


【Standby】

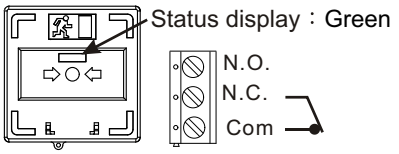


【Operation】

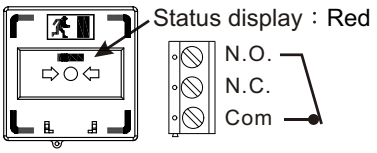

※Connections

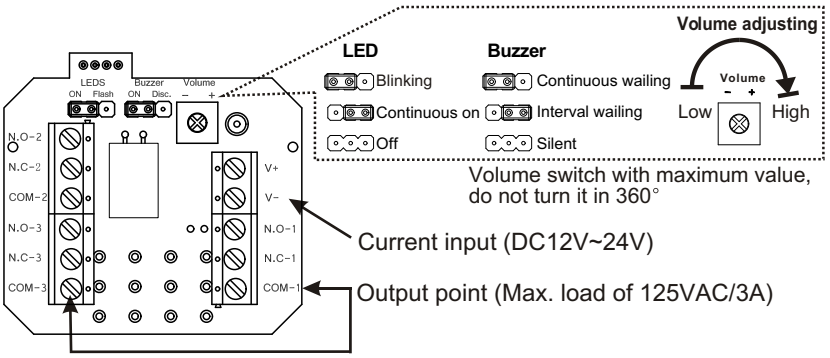


※Wiring Diagram

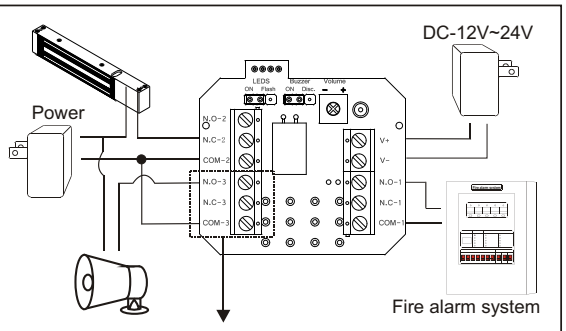


※Attention before installation


⚠ Please press the pressing plate to make sure the states turns red before opening the front and middle covers in order to prevent the spring being popped out.

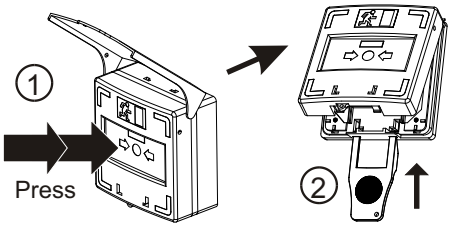

▲Fixed holes embedded box as 60mm.




▲Restricted terminal's aperture shown below.




※Installation

Surface Installation


1.




2.Use key to disassemble B and C fastenings.




3.Fix bottom cover C and connect the wires

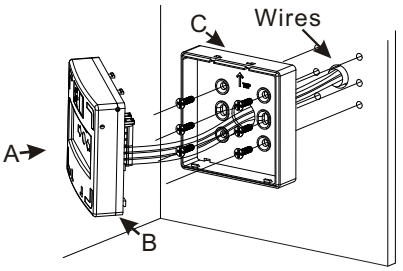


4.Fastening the unit as the diagram shown above.



5.Insert the key into the key hole. Pull the key out when the states turns green to complete the setting.




6. Cover the case and tie with a cable tie to prevent it from opening.




Embedded Installation


1.




2. Use key to disassemble B and C fastenings. No bottom cover C needed for embedded installation.

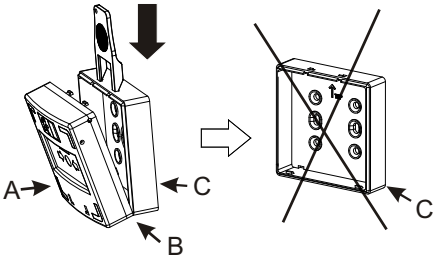


3. Use key to disassemble A and B fastenings. Clip the unnecessary buckle angles.

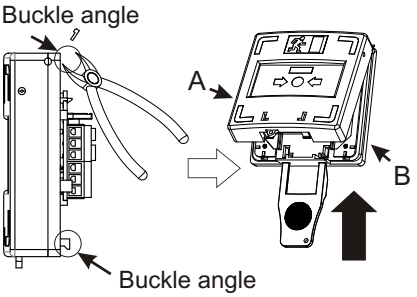


4. Fix middle cover B and connect the wires.

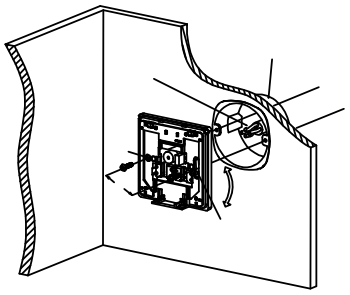

5. Fastening the unit as the diagram shown above.



6. nsert the key into the key hole. Pull the key out when the states turns green to complete the setting.



7. Tie it with a cable tie to prevent from pressing the button. It is suggested to remove the transparent panel if it is not tied with a cable tie.

