COMPANICS
Communication & Electronics LTD

כומפניקס תקשורת ואלקטרוניקה בע"מ
הבורסקאי 1 א.ת. סגולה, פ"ת | ספק מ. הביטחון: 83524121 | ח.פ: 512109968
03-9049004 טל' / | www.companics.co.il | sales@companics.co.il

Model Number: 06026
Multi-functions CCTV Tester

Description:



לצפייה באתר לחץ כאן

The 7 inch touch screen IP camera tester is designed for maintenance and installation of IP analog, HD coaxial cameras as well as other securit equipment. The 1280x800 resolution enables it to display network HD cameras and analog cameras in high resolution. The unit supports many ONVIF PTZ and analog PTZ control. Additional, it with othe functions RJ45 TDR cable test, UTP cable test and cable scan etc. CCTV installers often need to carry a variety of testing tools to complete their work. If take the all in one camera tester, making working conditions safer and increasing productivity.

- CCTV system installation and maintenance
- Network cabling project installation and maintenance
- Dome camera, IP TVI CVI AHD camera testing
- Video transmission channel testing
- PTZ controller

Feature:

- 7 inch IPS touch screen, 1280*800 resolutions
- Support 8K h.265 IP camera testing New
- 8MP TVI test,3840 x 2160P 15 fps,4xzoom ,video record &playback ,coaxial PTZ control & call OSD menu *
- 8MP AHD test, 3840 x 2160P P15fps, 4xzoom, video record & playback, coaxial PTZ & call OSD menu *
- 8MP CVI test, 3840 x 2160P 12.5/15fps, 4xzoom, video record& playback, coaxial PTZ & call OSD menu *
- HD SDI (1080P) ,3G SDI and 4K EX-SDI camera test
- Rapid ONVIF, Auto log in and display image, create testing report
- HDM input,720×480p /720×576p /1280×720p /1920×1080p /1024×768p/1280×1024p /1280×900p /1440×900p display, record and snapshot *
- HDMI output, Support 720P@25/30/50/60 Fps, 1080P@25/30Fps various formats video signal
- AXIS, Hikvision camera test, enter ONVIF app, input username and password to test
- Analog camera test and PTZ control
- IPC TEST (Non-ONVIF test), HIK test tool (Hikvision camera), DH test tool (Dahua camera)

- DC12V/3A power output, camera can be powered from DC 12 Voltage
- 48V PoE power output power/ DC 24V 2A Power output
- Professional Wi-Fi Analyzer, check Wi-Fi signal intensity
- Dual 1Gbps LAN ports, it can check network bandwidth, packet loss or error data
- Rapid video, just by one key to detect all network cameras and auto display
- Built in Wi-Fi, display image from the wireless camera, create WIFI hotspot
- CVBS loop test, the tester send and receive color bar generator signal, to check BNC cable
- Enhanced Color bar generator, PAL/NTSC multi-system color bar video generator

Cable test:

- Improvement cable tester, UTP cable, telephone cable etc order and connectivity test, can save testing report, if special number, need customized
- TDR2.0 cable test, BNC cable, network cable, telephone cable, RVV cable and elevator cable, cat 5/6 cable's length and short circuit. Measurement (max test length 1.2KM)
- RJ45 cable TDR test, test cable pair status, length, attenuation, reflectivity, impedance, skew etc (max 180m)
- BNC cable attenuation test

POE Test:

PD Test The tester receives the power(POE 802.3at), power supply voltage detection
PSE Test The tester supplies the power(POE 802.3at)25.5W, PD actual power detection

- Tester Play: Tester, android version mobile phone and PC display at the same time
- Shortcut button, drop-down menu, can select Poe power, IP setting, CVBS, LAN info, HDMI IN etc
- Traffic monitoring, display network port or WIFI connection real-time upload and download speeds and other network parameters
- Self -update software, you can install apps with android version
- Network tool: Ping, IP scan, Port Flash, DHCP server, Trace Route
- Quick office, quick office app (support excel, word, ppt format) doc. editable
- 8GB SD card including
- Display its genuine resolution of the IP camera images
- Audio in, support record and save the audio/LED lamp, calculators, music players and other application tools
- 7.6V/7800mAh Li- battery,4 hours fast charging working ,lasts for 16 hours

Specifications:

Item		Multi-functions CCTV Tester	
Model		06026	
Power Output	Analog	1 channel BNC input & 1 channel BNC looped output, NTSC/ PAL (Auto adapt)	
		Analog video level meter, peak video signal level, SYNC signal level, Color bar chroma level meas-urement	
		PTZ control,RS485 control, Baud 600-115200bps,compatible with more than 30 protocols such as PELCO-D/P, Samsung, Panasonic etc	
		1/4" Phone Jack (Unbalanced) Mic 1,2 2mV@600O AUX 1 1 00mV@1 0KO 1 /8" Jack(Unbalanced) AUX 2 1 00mV@1 0KO High Level Input 40V	
		CVBS loop test	the tester send and receive color bar generator signal , check BNC cable
	IP camera test8k/ H.265/H.264	IP Discovery/Quick ONVIF/IPC test /RTSP play /Client APK/	
		Rapid Video	Auto log in and view the video, create testing report
		Hik test tool	activate hikvision camera , modify the user name, password and IP pa-rameters
		Dahua test tool	Dahua camera test, modify the user name, password and IP parameters
	Coaxial HD test	Auto HD , automatically recognize type of HD input signal	
		8MP TVI camera test,3840 x 2160P 15 FPS, UTC control/ call OSD menu	
		8MP CVI camera test,3840 x 2160P 12.5/15 FPS,UTC control call OSD menu	
		8MP AHD test, 3840 x 2160P 15 FPS, UTC control d call OSD menu	
		HD SDI, support 1080P 50/60 FPS , 4K EX-SDI camera test	
	HDMI input / Output	1 channel HDMI input support 4K 30 FPS , and 1 channel output, support 4K 60FPS	
	Zoom Image	4x zoom, to enlarge image, Screen snapshot, record ,save ,view and record and play back	


Specifications:

Item		Multi-functions CCTV Tester
Model		06026
Analog Video out	Color bar generator	Output one channel PAL/NTSC color bar video signal for testing monitor or video cable
	DC24 POWER	DC24 power out
Power output	PoE power output	48V PoE power output, max power 24W
	DC12V power	DC12V /3A power output
Cable test	TDR2.0 cable test	BNC cable, network cable, telephone cable, RVV cable and elevator cable, cat 5/6 cable's length and short circuit. measurement range 1.2KM
	Cable tracer	search BNC cable, network cable and telephone cable from the mess cables
	UTP cable test	Test UTP cable connection status and display on the screen. Read the number on the screen
	BNC attenuation	BNC cable attenuation test
	RJ45 cable TDR test	Test cable pair status, length, attenuation, reflectivity, and impedance, skew etc. max range 180M.
VGA INPUT		Support VGA input
TesterPlay		screen projection: tester, mobile phone and PC display at the same time (For android version mobile phone), remote control
Network test		Trace route, Link monitor , DHCP server, port flashing , Ping test
Wi-Fi		Built in WIFI,speeds150M,display wireless camera image
WIF Analyzer		Detect the surrounding wifi signal and signal strength, support 2.4Gfrequency band.
Audio test		1 channel audio signal input, test whether sound normal, 1 channel audio signal, to connect headphone
Data monitor		Captures and analyzes the command data from controlling device, also can send hexadecimal
PoE test		Measurement POE switch or PSE power supply voltage and cable connection status
Digital Multimeter		DC and AC voltage measurement, Resistance measurement, Continuity test, Diode measurements, Capacitance measurement
Optical power me-ter		Wavelength：1625,1550nm,1490nm,1310nm,1300nm,850nm, measurement range ,-70 ~ +10 dBm, for optical power testing and Fiber link loss relative measurement

Specifications:

Item	Multi-functions CCTV Tester
Model	06026
Visual fault locator	10mW visual fault locator with 650nm wavelength can emit red laser sources to test multi-mode and single mode fiber's bending and breakage, test range 10KM
TDR cable test	BNC cable, network cable, telephone cable, RVV cable and elevator cable, cat 5/6 cable's length and short circuit. measurement range 1.2KM
External power sup-ply	DC 12V 2A
Battery	Built-in 7.6V Lithium polymer battery ,7800mAh
Rechargeable	After charging 3.5~4 hours, normal working time 16 hours
Operation setting	OSD menu, select your desired language: English, Chinese, Korean, Russian, Italian, French, Polish, Spanish, Japanese etc
Auto off	1-30 (mins)
Working Temperature	-10℃---+50℃
Working Humidity	30%-90%
Dimension/Weight	240mm x 154mm x 46mm / 620g

Wire:

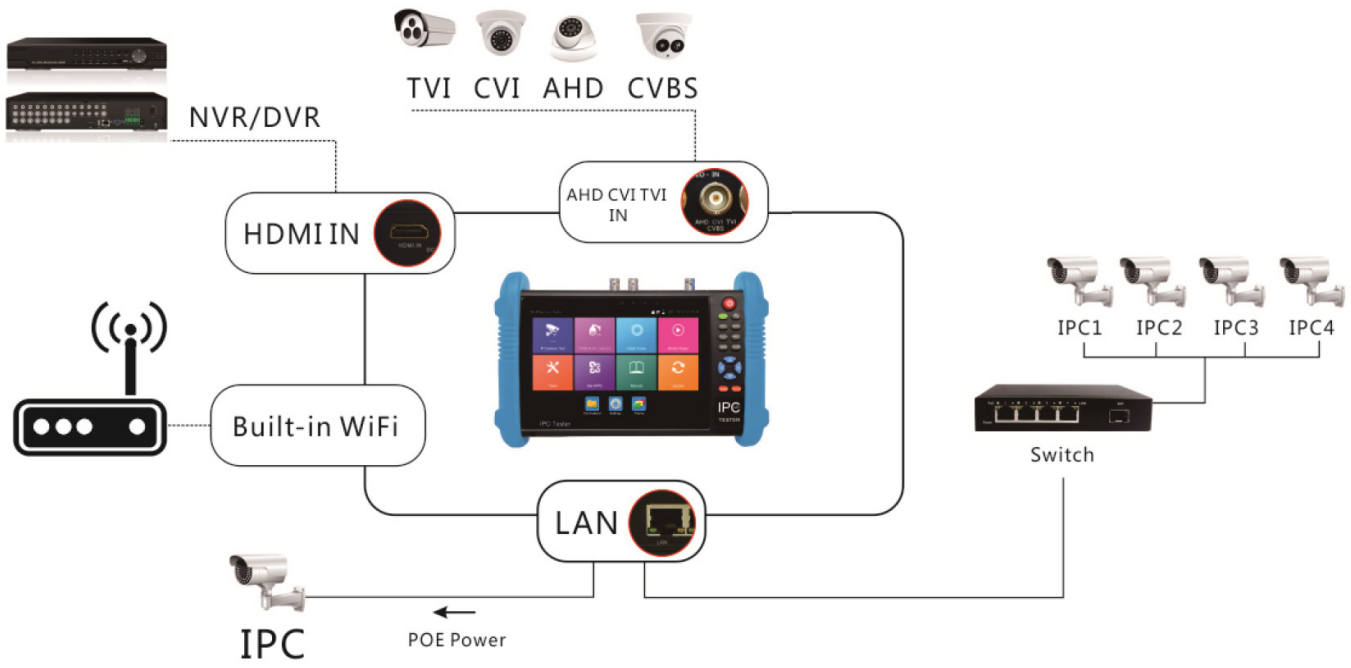

Packing kits:



IPC-9800 Pro | Packing box | Tool bag | Lithium battery



Accessories box | Safety cord | Digital Multi-meter pen | Charger



Rs485 Control cable | BNC cable | Fiber test head | Power output cable



Audio test cable | Cable tracer | TDR cable Clip