


Ultralow Temperature Simple Type Electric Bolt Lock

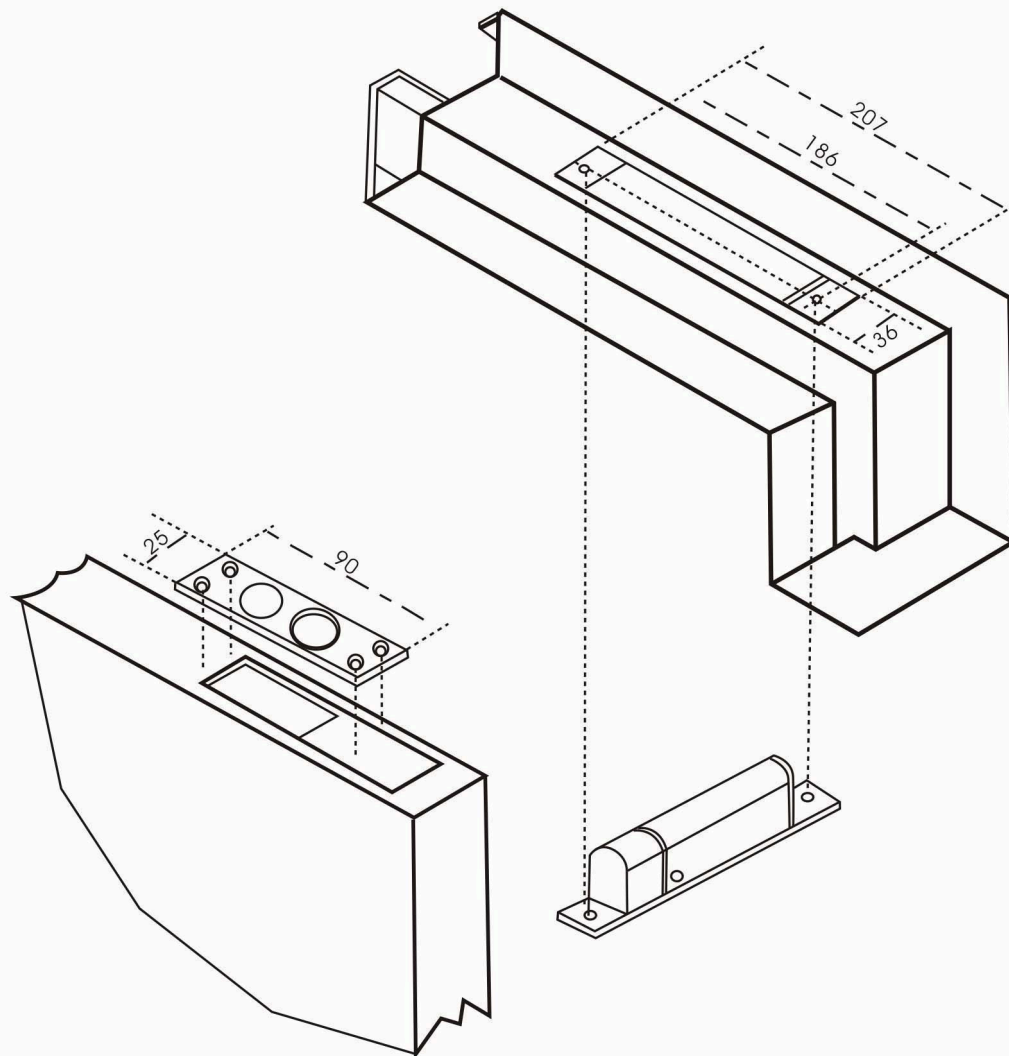

Ultralow Temperature Simple Type Electric Bolt Lock

1: Products Specifications

Red: + DC12V Black: - GND
Yellow: push button switch+(brown)
White: Normally-on threshold(position monitor red)
Blue: Colinearity threshold(position monitor red)
Working current: start at 900 mA, standby current 120mA
Coil classes:ultralow temperature continuous work type
Safe type: unlock when power off
MOV provides reverse current protection
Bolt: 16mm DIA, stainless steel 16mm throw
Installation size: 207X36x40mm
Decorative plate: 215X41x0.5mm
Face plate : 205X35x39mm




Character

- 1: Sturdy and durable,100% safe
- 2: Low power, environmental protection
- 3: Low temperature design:more sturdy,durable and safe
- 4: Professional power supply and excellence partner
- 5: CE,MA approved
- 6: Quality guarantee: 12 months


Installation Instruction

The following table are the types of electric bolt lock, and in accordance with the models identified openings paper, Place the lock screws embedded position. (This table is a fully built-in installation)


	A	B	C	D	E
Standard	207	36	12	91	26
Safe	207	36	12	91	26
Multifunctional	207	36	12	91	26
Ball catch	207	36	12	101	36
Narrow	207	31	12	101	26

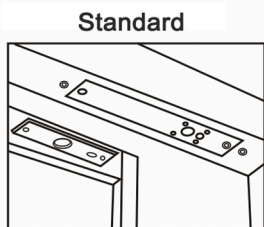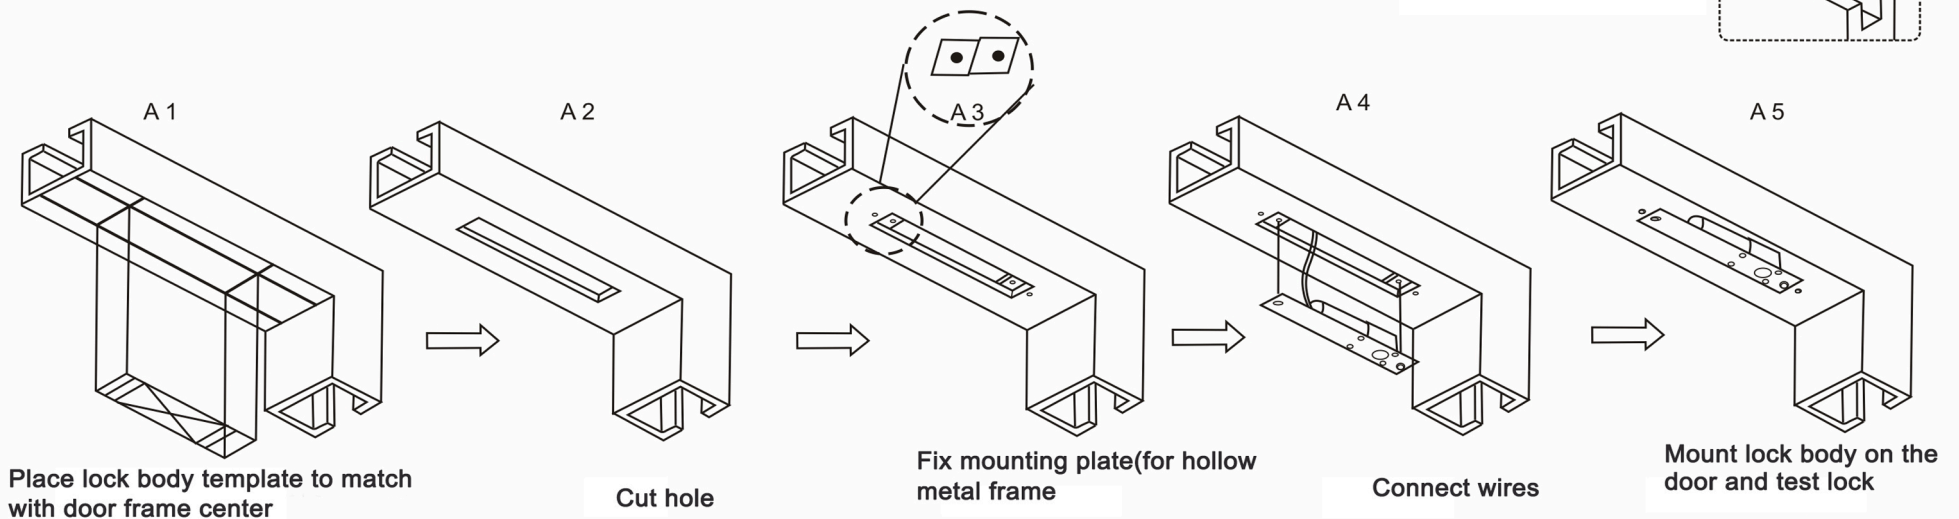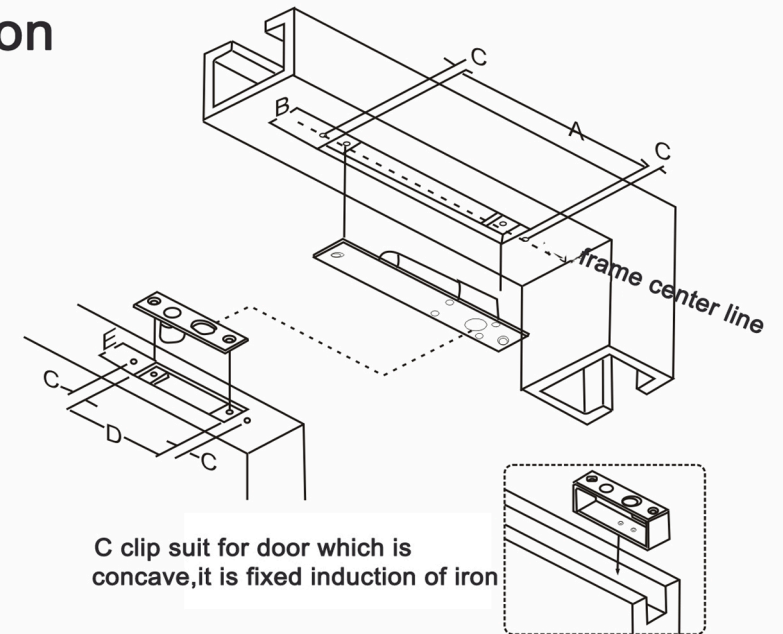


B1

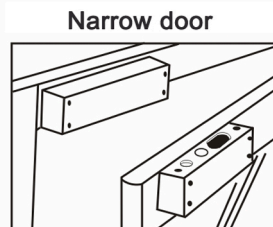

B2



B3

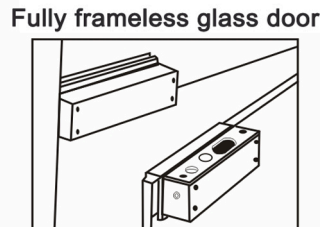

B4