


Model Number 16701
RG-58, 100m / 1m



Wire:

לצפייה באתר לחץ כאן

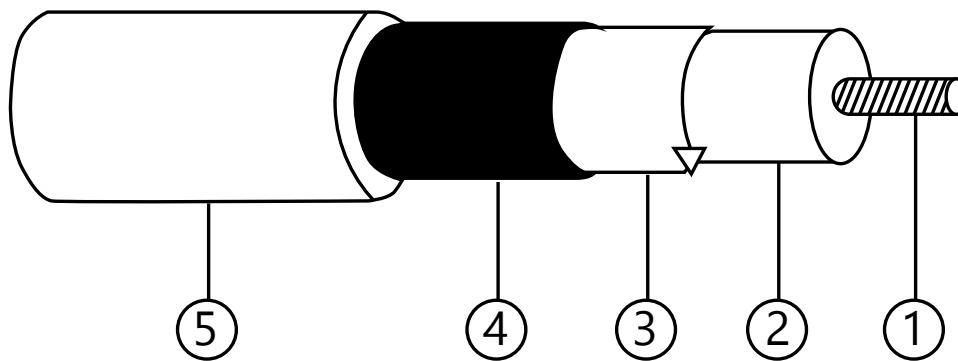

Specifications:

Product		RG-58, 100m / 1m
Model	16701	
Inner Conductor	Stranded Tinned Copper: 19×0.18(+/-0.01)mm	
Dielectric	Solid PE	
Diameter(mm)	2.93(±0.10)mm	
Outer Conductor	1st Shield	Aluminum/Polyester Foil
	Thickness (mm)	9/12μm
	Min.overlap	2mm
2nd Shield	Formation	16×5×0.10(+/-0.008)mm, Lay=26.8((+/-3)mm
	Coverage	68%

Product		RG-58, 100m / 1m	
Sheath	PVC/RoHS		
Colour	Black		
Electricak Data	Characteristic Impedance At 200 Mhz	50±2 OHMS	
	Nominal Capacity (800 Hz)	100±5.6 PF/m	
	Insulation Resistance At 20°	> 5000 Mohms.km	
	Dielectric Strength At 50 Hz, 1 Min	> 5000v	
	Inner Conductor Resistance	< 40.7 Ohms/Km	
	Outer Conductor Resistance	< 32 Ohms/Km	
	Velocity Of Propagatio	66%	
Maximum attenuation	At 50 Mhz	10.90 Db/100 M	
	At 100 Mhz	17.10 Db/100 M	
	At 200 Mhz	23.00 Db/100 M	
	At 400 Mhz	33.80 Db/100 M	
	At 550 Mhz	39.20 Db/100 M	
	At 600 Mhz	42.50 Db/100 M	
	At 750 Mhz	47.20 Db/100 M	
	At 860 Mhz	49.80 Db/100 M	
	At 1000 Mhz	53.70 Db/100 M	
Temperature Range	Static	-30°C→+70°C	
	Dynamic	-20°C→+70°C	
Minimum Bending Radius	70mm		