COMPANICS
Communication & Electronics LTD

כומפניקס תקשורת ואלקטרוניקה בע"מ
הבורסקאי 1 א.ת. סגולה, פ"ת | ספק מ. הביטחון: 83524121 | ח.פ: 512109968
טל' / 03-9049004 | www.companics.co.il | sales@companics.co.il

Model Number 22020C
Lobby Camera Phone DR-2AG / DR-2AG-RF1

Description:

COMMAX Audio Gate System is Optimized forMulti-Complex Apartments and Buildings. it also Provides a Simple Installation Method and Expandanility for Cost-Effective Impiementation.



לצפייה באתר לחץ כאן

Features:

- Page and call a household unit or asecurity guard station with vari ous verification methods & name search function
- Expandability Up to 4~1,000 household units
- Clear & Bright Information Display Legibility under bright or low light environment via OLED Display


Specification:

Item	Lobby Camera Phone DR-2AG / DR-2AG-RF1
Model	**22020C**
Installation	Flush Mount Type installation
Wiring	UTP Cable(ø 0.5), Floor Distributor(common 6 wires), Security station phone(common 4 wires)
Power Source	12V =,1A
Power Consumption	Standby: 135mA, Maximum: 320mA
Call Method	Handsfree(one way)
Effective Call Range	100m
RF Sensing Range	60mm
Lighting	Built-in LED light for night use
Temperature	-20°C(tested up to -40°C) ~ 40°C
Dimensions	130 (W) x 315 (H) x 40 (D) mm


RF-ID Model (Optional):

Item	Lobby Camera Phone DR-2AG-RF1
Model	**DR-2AG/RF1**
Frequency	13.56MHz
Antenna power range	Under 47.5mV/m within 10 meter radius
Power	12V =
Emission Type	A1D
Number of Channel	1 Channel
Modulation method	ASK
Communication method	Simplex Operation Method
Temperature	-10°C(tested up to -40°C) ~ +50°C, 95%-20°C(tested up to -40°C) ~ 40°C

Connection:

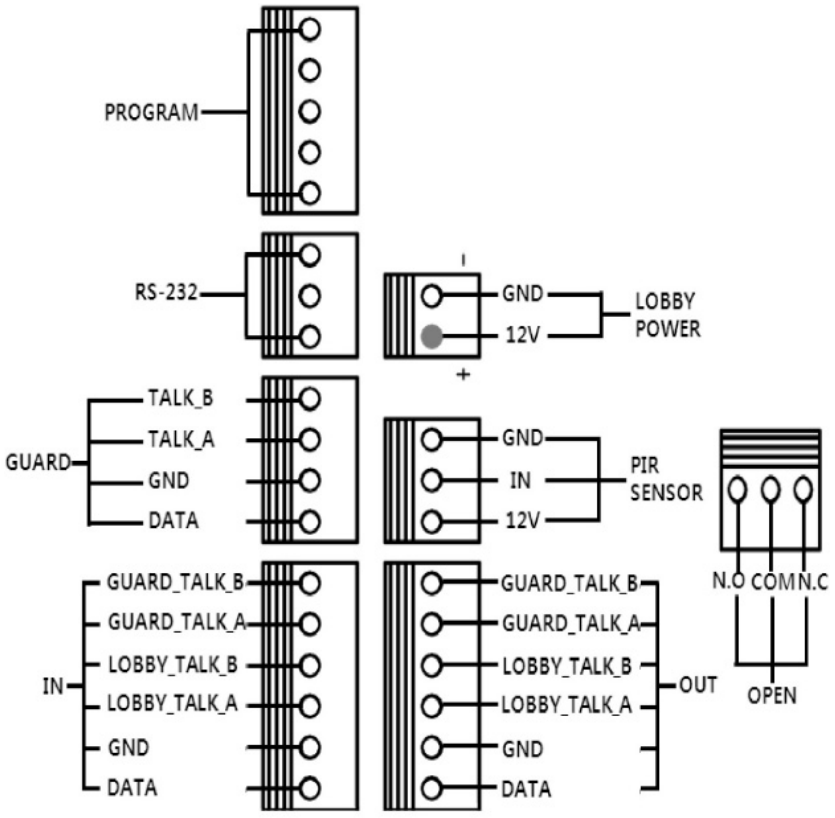

Wire:

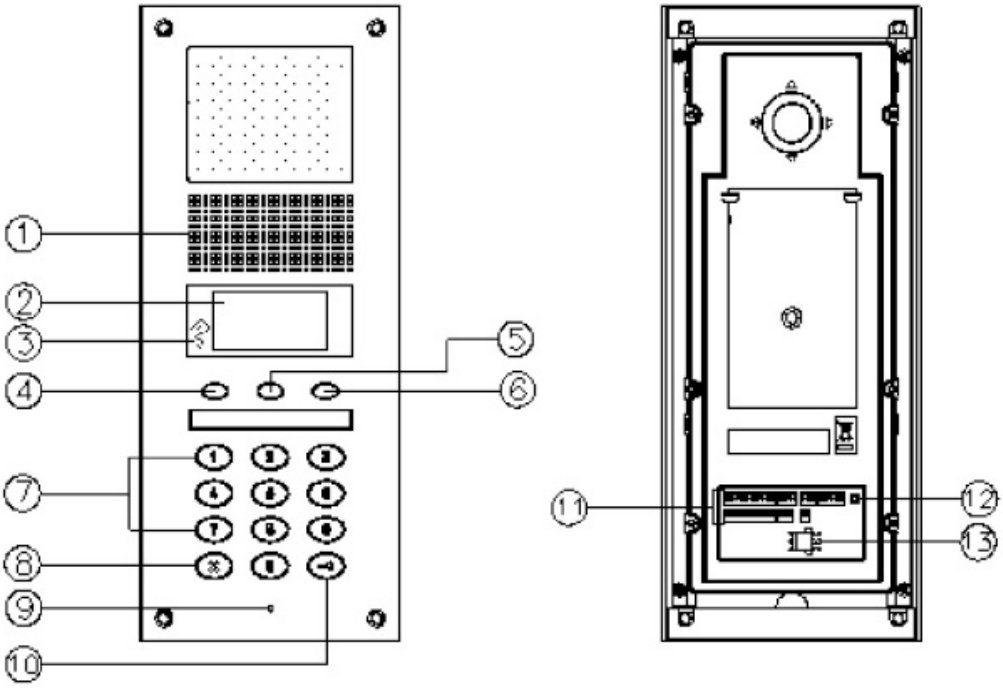

1. Speaker
2. OLED Display
3. RFID card receiver
4. Name Searching button / Menu Page Button
5. Up & Down scroll button/Program Button
6. Call Button
7. Number button
8. Cancel Button
9. C-MIC
10. Electric Key Button
11. Line connecting button
12. Reset Button
13. Circuit Connect Switch