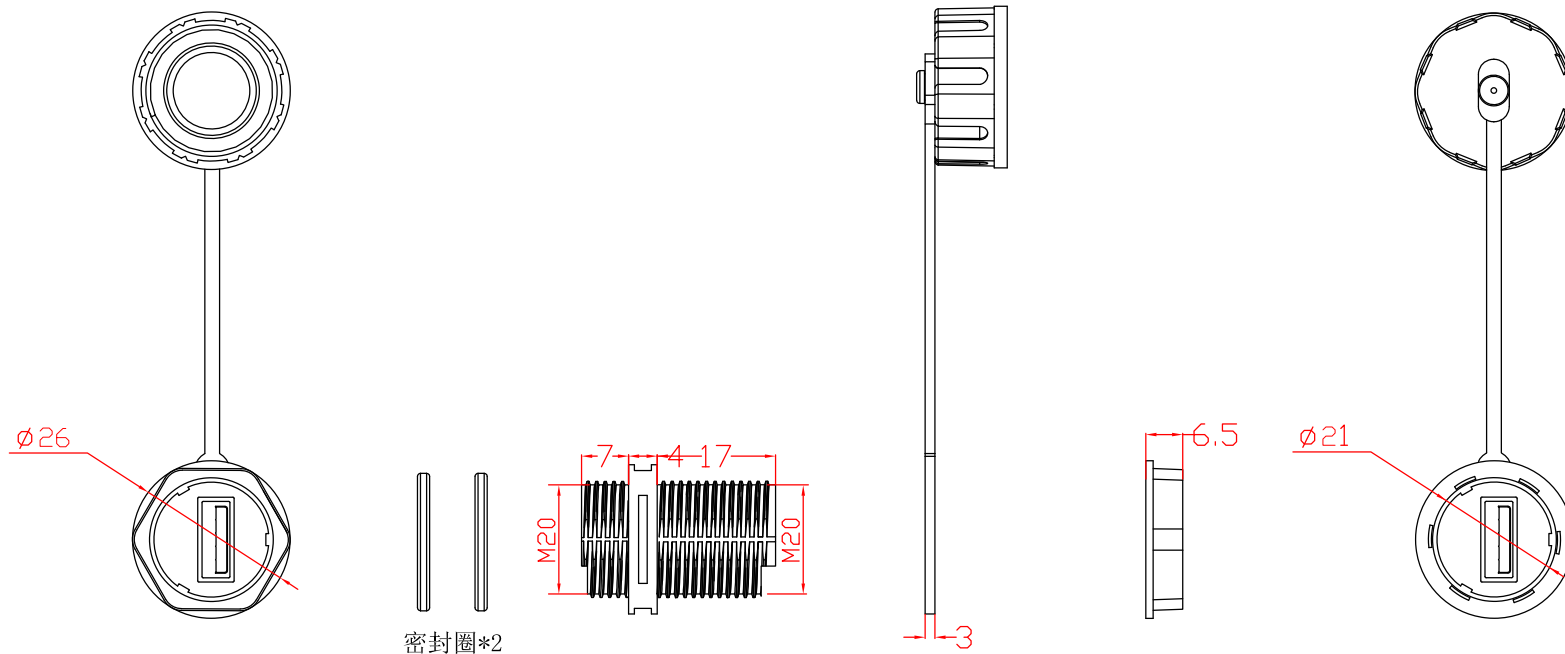






Specifications:

1. Please refer to tolerance table if no tolerancis specified
2. Product surface must not have burr, be out ofshape, dirty wait for undes irable phenomenon
3. Raw materials need to meet Rohs s standards (RoHS), Insertion force and extraction force <19. 6N
4. Insertion loss : <0. 2dB
5. Durability test 500 cycles
- 6.High and low temperaturetesting -20°C to 70°C

Technical parameters:

1. Housing Material:PA66
2. Adapter housing material:PC
3. Sealing ring material: silicone

										
					Material		PA66		Item No.	17310
SYM	Number	Bill No. of Alteration	Signature	Date	Angles Projection		Size	Scale	Unit	Part Name Waterproof USB3.0 connector, IP68, M20 W/Dust cap
Drawn		2022. 12. 01	Tolerance				A4	X:1	mm	
Checked		2022. 12. 01	0.00-20.00 ±0.10 20.00-50.00 ±0.15 50.00-100.00 ±0.20				A4	X:1	mm	ERP
Approved		2022. 12. 01	100.00- ±0.25 Angle ±30'							
					Sheet	1 OF 1	Version: A/0		Part No.	16000884