
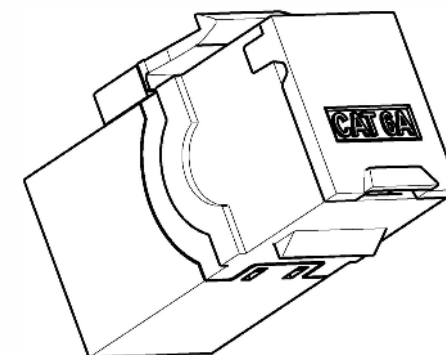








#### NOTES:

##### ELECTRICAL:



1. VOLTAGE RATING:125 VAC RMS
2. CURRENT RATING:1.5AMP
3. CONTACT RESISTANCE:100MILLIOHMS MAX
4. INSULATION RESISTANCE:1000 MEGOHMS MIN @500 VDC
5. DIELECTRIC STRENGTH:750 VAC RMS 60Hz, 1MIN

##### ENVIRONMENTAL:

1. STORAGE:-40° TO +85°
2. OPERATION:0° TO 70°

##### MECHANICAL:

1. THE SHELL MATERIAL: ZINC ALLOY
2. HOUSING MATERIAL:PC
3. INSERT MATERIAL:FAME RETARDANCY PBT
4. PCB MATERIAL:FR-4 T=1.6mm
5. CONTACT MATERIAL:PHOSPHOR BRONZE STAMP  
PIN T=0.30mm
6. IDC CONTACT MATERIAL:PHOSPHOR BRONZE  
T=0.50mm WITH TIN PLATING
7. RJ45 JACK ;IFE:750 TIMES MIN
8. IDC LIFE:200 TIMES MIN
9. WIRE:AWG 22-26

|          |              |                        |                                                                                                  |      |                                                                                       |        |              |       |      |           |                           |
|----------|--------------|------------------------|--------------------------------------------------------------------------------------------------|------|---------------------------------------------------------------------------------------|--------|--------------|-------|------|-----------|---------------------------|
|          |              |                        |                                                                                                  |      |  |        |              |       |      |           |                           |
|          |              |                        |                                                                                                  |      | Material                                                                              |        |              |       |      | Item No.  | 17330                     |
| SYM      | Number       | Bill No. of Alteration | Signature                                                                                        | Date | Angles Projection                                                                     |        | Size         | Scale | Unit | Part Name | STP Cat. 6A Keystone Jack |
|          |              |                        |                                                                                                  |      |  |        | A4           | X:1   | mm   |           |                           |
| Drawn    | Ding jian bo | 2015.12.31             | Tolerance                                                                                        |      |  |        | A4           | X:1   | mm   | ERP       | Part No.                  |
| Checked  | Ge pei jun   | 2015.12.31             | 0.00-20.00 ±0.10<br>20.00-50.00 ±0.15<br>50.00-100.00 ±0.20<br>100.00- Angle ±0.25<br>Angle ±30° |      |                                                                                       |        |              |       |      |           |                           |
| Approved | Wang wei jun | 2015.12.31             |                                                                                                  |      |                                                                                       |        |              |       |      |           |                           |
|          |              |                        |                                                                                                  |      |                                                                                       |        |              |       |      |           |                           |
|          |              |                        |                                                                                                  |      | Sheet                                                                                 | 1 OF 1 | Version: A/0 |       |      |           |                           |