

Model Number: CM-800L Shelter Intercom up to 30 Extensions

Features:

- 10, 20 or 30 call master with connection for add-on selectors available.
- 10 watt output for powerful communication.
- Up to one masters and any combination of subs multi - station.
- Up to circuit wires may be available.
- Separate transmitting and receiving tone volume controls on panel.
- Master station designed either for desk top use or wall mounting applications.
- Call tone volume adjustable for individual station requirements.
- Privacy switch(Sub station) for loudspeaking microphone prevents monitoring or eavesdropping by another master while in privacy position.




[לצפייה באתר לחץ כאן](#)

Specifications:

Item	Shelter Intercom up to 30 Extensions
Model	CM-800L
Power Source	95-235V~, 60Hz (For North America standard)
Current Consumption	180mA (Maximum)
Power Consumption	2A (paging) - 30 wires
Calling	Press button station selection
	A single chime sounds when call button is depressed
Communication Output	180mA maximum at master (with receive tone control at master)
	180mA maximum at sub (with transmit tone control at master)
All Call Output	10W system of up to 10 sub stations
Type of Communication	Press-to-talk loudspeaking communication
Calling Details	Master station: Called by tone and lamp (remain until answered)
	Sub station: Called by voice from master, after pre-tone sounds
Communication Distance	2000m/0.65mm

Location and Control of Functions:

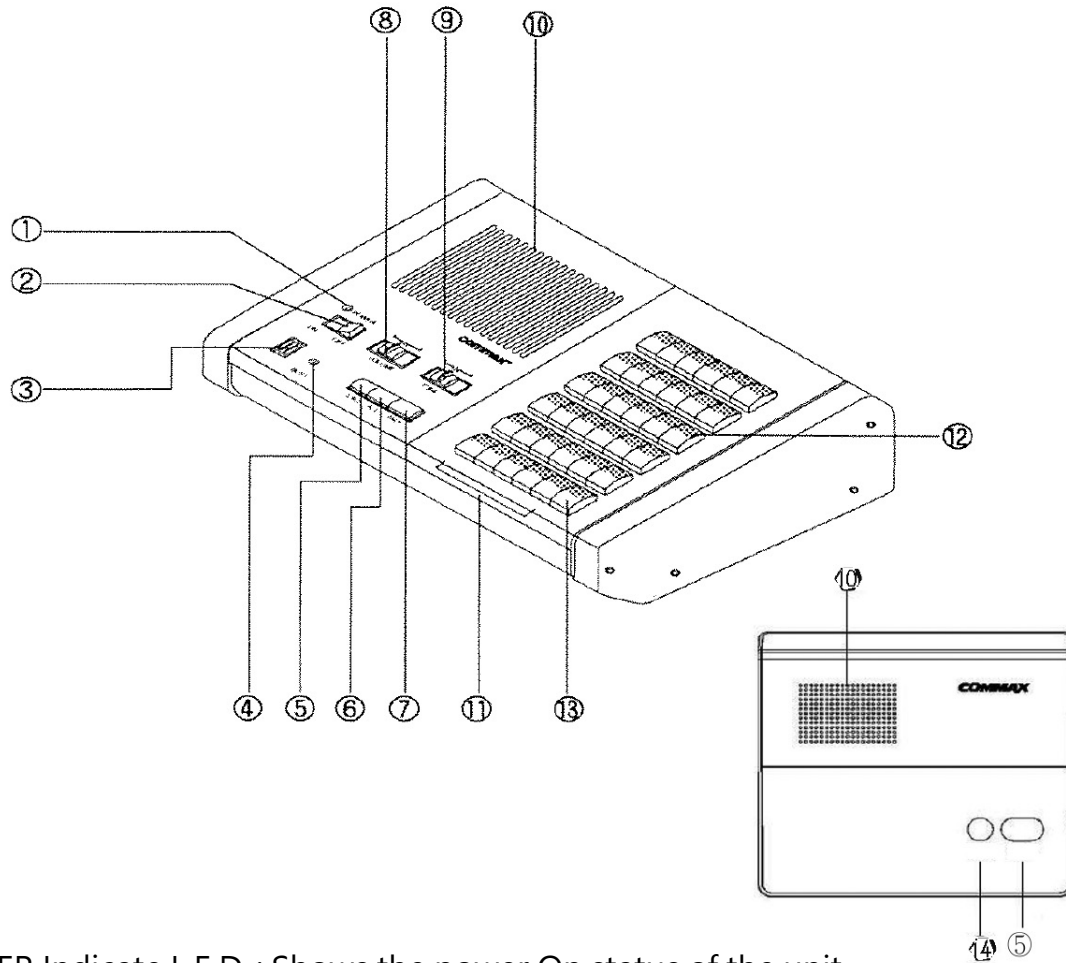

1. POWER Indicate L.E.D. : Shows the power On status of the unit.
2. Power Switch : Turn on the main power to the unit.
3. Microphone : Place next to your mouth for intercom conversations.
4. Annunciator L.E.D. : Indicates called party is busy when lit. Also lights when calling other stations.
5. Calling Button : Turn on the button, an electronic call tone will sound at the master and can speak and listen : "Hands free".
6. Broadcasting Button: Using for all broadcasting.
7. TALK Button : Transmitted signal to sub station or master station.
8. Volume Control for reception : Adjust that volume increase or decrease for reception.
9. Calling Control for Transmission : Adjust that volume increase or decrease for transmission.
10. Speaker : Output conversation.
11. Selector Buttons : Selected substation for communication.
12. Lamps : Call from the sub station is OFF, turn on the selector button is ON.
13. Group Button : Using for group broadcasting.
14. Privacy Button : When pressed, this button prevents master from listening-in or eavesdropping with hands free.

Wire:

