
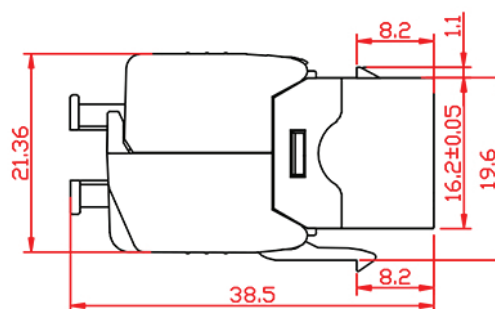
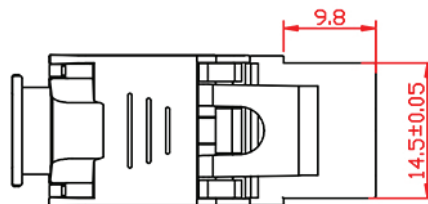



Dust cover top
adhesive
Layout diagram



NOTES:

ELECTRICAL:

1. VOLTAGE RATING:125 VAC RMS
2. CURRENT RATING:1.5AMP
3. CONTACT RESISTANCE:100MILLIOHMS MAX
4. INSULATION RESISTANCE:1000 MEGOHMS MIN @500 VDC
5. DIELECTRIC STRENGTH:750 VAC RMS 60Hz, 1MIN

ENVIRONMENTAL:

1. STORAGE:-40° TO+85°
2. OPERATION:0° TO70°

MECHANICAL:

1. THE SHELL MATERIAL: ZINC ALLOY
2. HOUSING MATERIAL:ABS
3. INSERT MATERIAL:FAME RETARDANCY PBT
4. PCB MATERIAL:FR-4 T=1.6mm
5. CONTACT MATERIAL:PHOSPHOR BRONZE STAMP
PIN T=0.30mm
6. IDC CONTACT MATERIAL:PHOSPHOR BRONZE
T=0.50mm WITH TIN PLATING
7. RJ45 JACK ;LIFE:750 TIMES MIN
8. IDC LIFE:200 FTIMES MIN
9. WIRE:AWG 22-26

										
					Material				Item No.	17331
SYM	Number	Bill No. of Alteration	Signature	Date	Angles Projection	Size	Scale	Unit	Part Name	CAT8 Toolless Keystone jack, Shielded Type
Drawn	Ding jian bo	2018.9.20	Tolerance			A4	X:1	mm		
Checked	Ge pei jun	2018.9.20	0.00-20.00 ±0.10 20.00-50.00 ±0.15 50.00-100.00 ±0.20							
Approved	Wang wei jun	2018.9.20	100.00- Angle ±0.25 ±30°							
					Sheet	1 OF 1	Version: A/0		ERP Part No.	