

Model Number: 18118
Digital to Analog Audio Converter

Description:

This Digital to Analog Audio Converter is designed for either home or professional audio switching. It converts Coaxial or Toslink digital audio signals to analog L/R audio and available for connection to an external device such as amplifier via standard RCA-style jacks. This Converter is small in size and quite easy to install.


Features:

- Converts coaxial or toslink digital audio signals to analog L/R audio
- Available for connection to an external device such as an amplifier via standard RCA jacks
- Supports sampling rate at 32,44.1, 48 and 96KHz
- 24-bit S/PDIF incoming bit stream on left and right channels
- Provides electromagnetic-noise-free transmission
- Easy to install and simple to operate
- Compact size and light weight
- Digital Optical Coaxial Toslink Signal to Analog Audio Converter is designed for either home or professional audio switching
- It converts Coaxial or Toslink digital audio signals to analog L/R audio and available for connection to an external device such as an amplifier via standard RCA-style jacks
- This Converter is small in size and quite easy to install.



[לצפייה באתר לחץ כאן](#)

Wire:

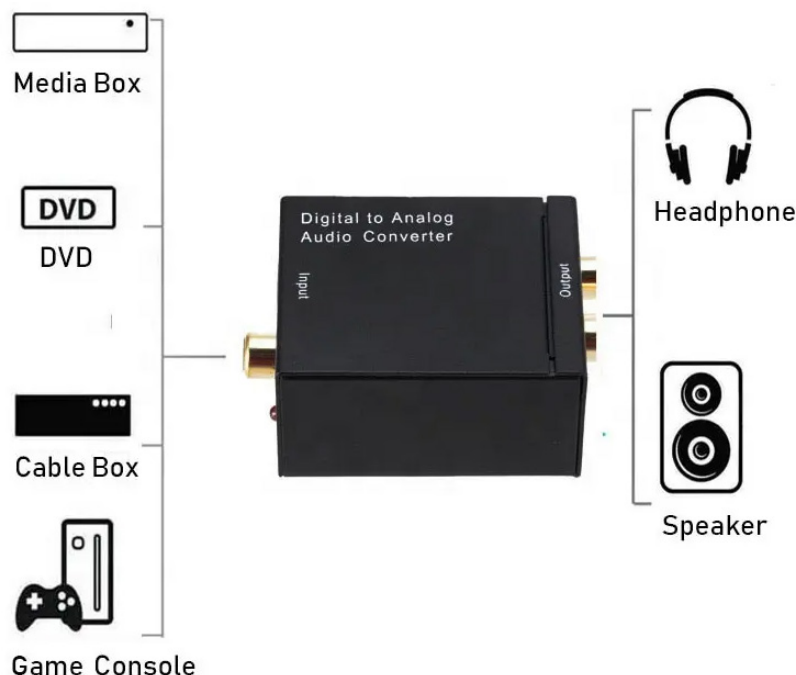

Specifications:

Item	Digital to Analog Audio Converter
Model	18118
Input Audio	Coaxial or Toslink digital audio
Output Audio	L/R audio
Input Audio Connector	Toslink 1*RCA(Coaxial)
Output Audio Connector	2*RCA(R/L)
External Power Supply	DC 5V 1A (We offer a USB Power Cable, you can use the cable to connect the converter to the USB of computer,TV, AMP or other devices for power.)
Power Consumption	0.5 watts (max)
Converter Unit	FCC,CE,UL
Power Supply	UL,CE,FCC
Sampling rate	32,44.1,48 and 96 KHz
Operating Temperature	0 °C to +70°C
Operating Humidity	10% to 85% RH (no condensation)
Storage Temperatur	-10 °C to +80°C
Storage Humidity	5% to 90% RH (no condensation)
Size(LxWxH)	51x41x26mm
Weight(Net)	78g
Color	Black