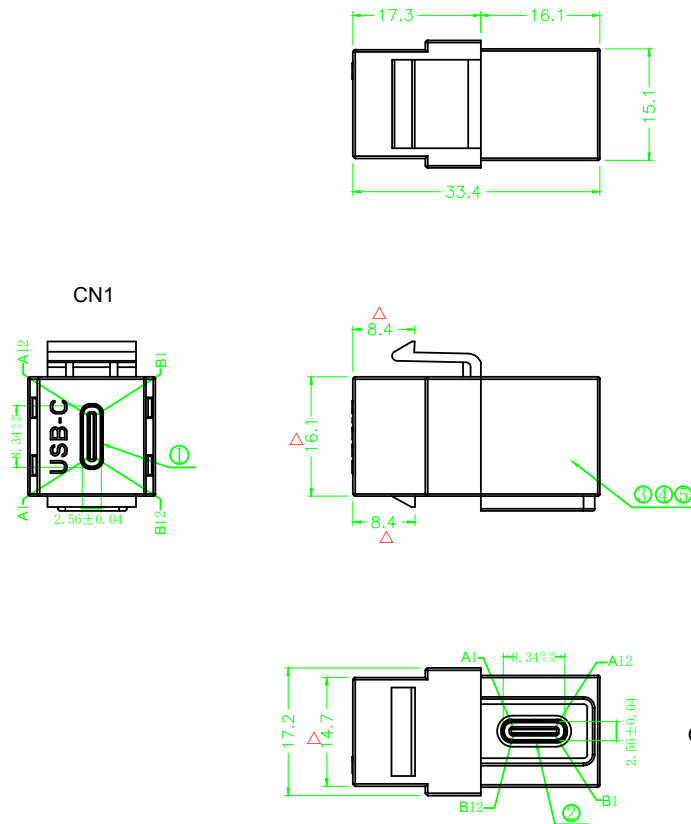


CN1	CN2
A1 A12 B1 B12	A1 A12 B1 B12
A4 A9 B4 B9	A4 A9 B4 B9
A5	A5
B5	B5
A6 B6	A6 B6
A7 B7	A7 B7
A2	B11
A3	B10
B11	A2
B10	A3
B2	A11
B3	A10
A11	B2
A10	B3
A8	B8
B8	A8
SHELL	SHELL

NOTES:

ELECTRICAL:

1. VOLTAGE RATING:125 VAC RMS
2. CURRENT RATING:1.5AMP
3. CONTACT RESISTANCE:100MILLIOHMS MAX
4. INSULATION RESISTANCE:1000 MEGOHMS MIN @500 VDC
5. DIELECTRIC STRENGTH:750 VAC RMS 60Hz, 1MIN

ENVIRONMENTAL:

1. STORAGE:-40° TO +85°
2. OPERATION:0° TO 70°

											
					Material		SizeScaleUnit			Item No.	18303
					Angles Projection						