



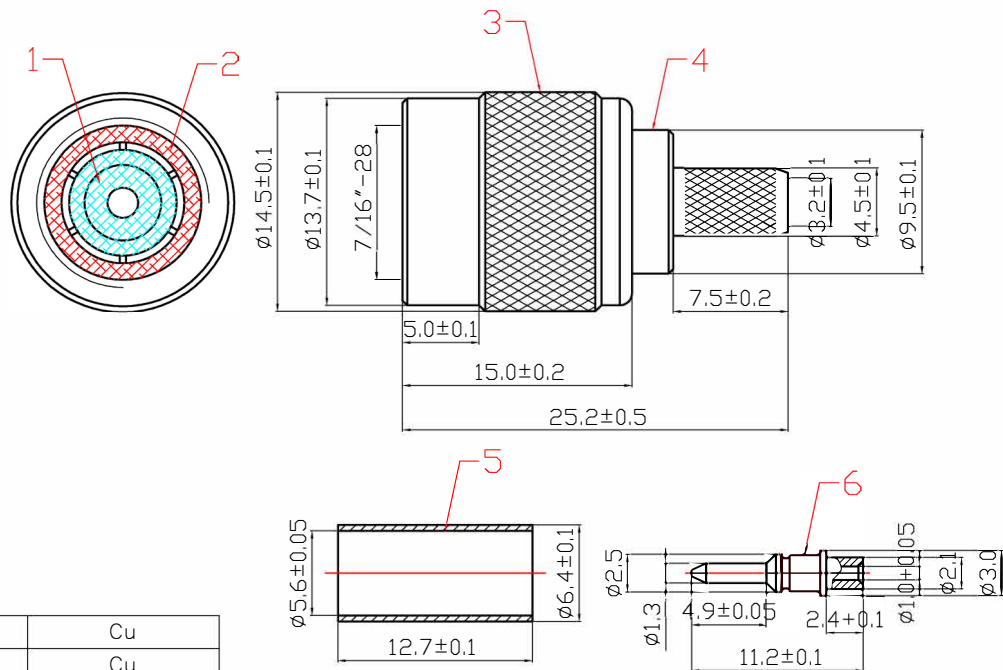

6	PIN	Cu
5	CRIMPING TUBE	Cu
4	BODY	Cu
3	SHELL	Cu
2	RING SEALING	Rubber
1	DIELECTRIC	POM
ITEM	DESIGNATION	MATERIAL
REV	10701	DATE BY
A	JR-6601/58U	
B		


TOLERANCE	SIGNATURES	DATE
0 - 10 ±0.05 10 - 99 ±0.5 100 - 999 ±10.0 1000 - 9999 ±100.00 10000 - 99999 ±1000.00	DRAFT: YangYongRui CHECKED: HuGongXue	07.04.09
APPROVAL:	SCALE	UNIT
	1:1	mm
SHEET	REV	TITLE
OF	Ø	TNC Male Crimp Type (RG-58U)
		CUSTOMER

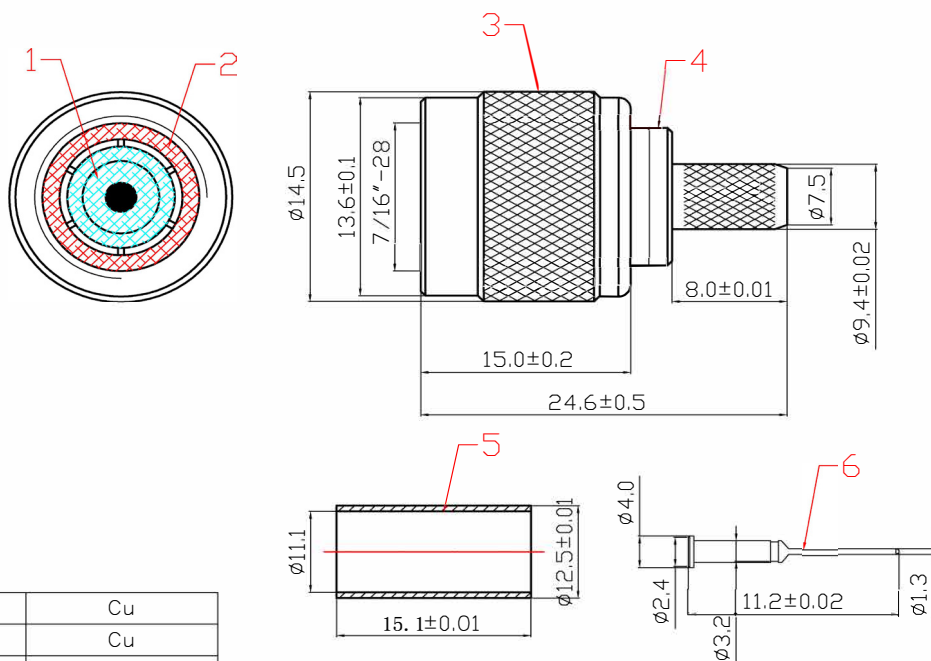

6	PIN	Cu
5	CRIMPING TUBE	Cu
4	BODY	Cu
3	SHELL	Cu
2	RING SEALING	Rubber
1	DIELECTRIC	POM
ITEM	DESIGNATION	MATERIAL
REV	10730	DATE BY
A	JR 6601/213u	
B		

TOLERANCE	SIGNATURES	DATE
0 - 10 ±0.05 10 - 99 ±0.5 100 - 999 ±10.0 1000 - 9999 ±100.00 10000 - 99999 ±1000.00	DRAFT: cheng huan CHECKED:	09.03.04
APPROVAL:	SCALE	UNIT
	1:1	mm
SHEET	REV	TITLE
OF	Ø	TNC Male Crimp Type (RG-213U)
		CUSTOMER



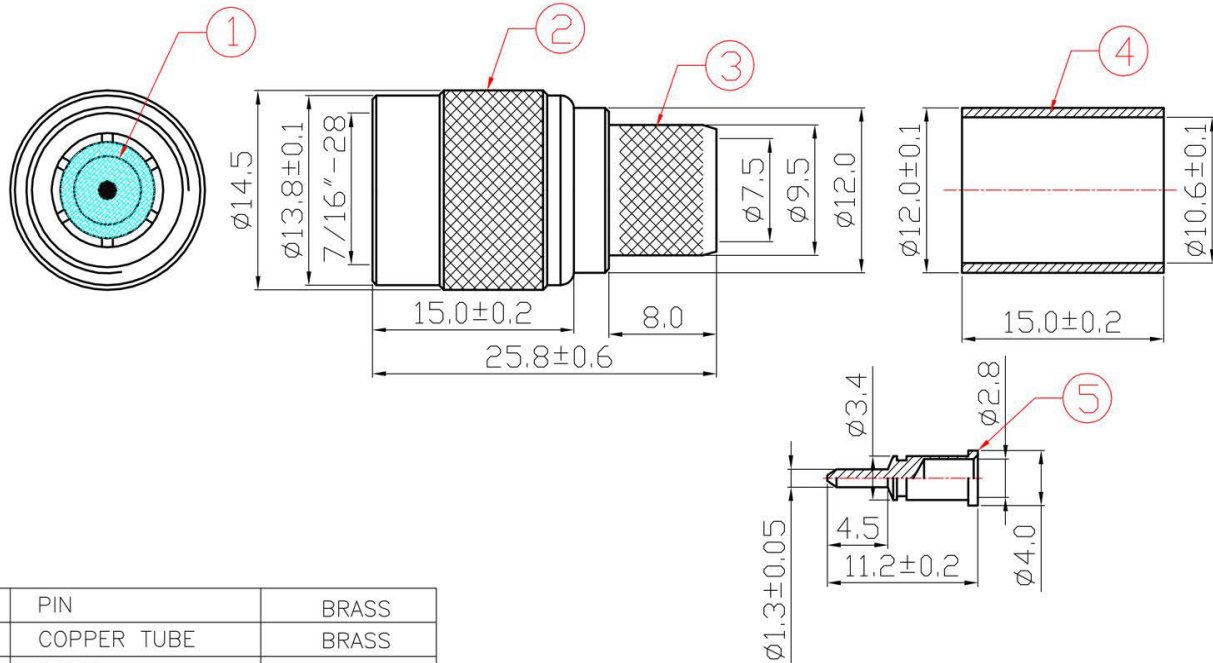

5	PIN	BRASS
4	COPPER TUBE	BRASS
3	BODY	BRASS
2	SHELL	BRASS
1	DIELECTRIC	POM
ITEM	DESIGNATION	MATERIAL
REV.	ECO	PART NO.
A0		10733
B		

TOLERANCE	SIGNATURES	DATE
0 - 10 ±0.05	DRAFT: HuGongXue	06.04.05
10 - 99 ±0.5	CHECKED:	
100 - 999 ±10.0		
1000 - 9999 ±100.00		
10000 - 99999 ±1000.00		
APPROVAL:	SCALE	UNIT
	1:1	mm

COMPAC ®	
TITLE	TNC Male Crimp Type (LMR-400)
CUSTOMER	