


|      |             |   |      |
|------|-------------|---|------|
|      | 5           | 6 | 7    |
| REV. | Description |   | Date |
| A    |             |   |      |

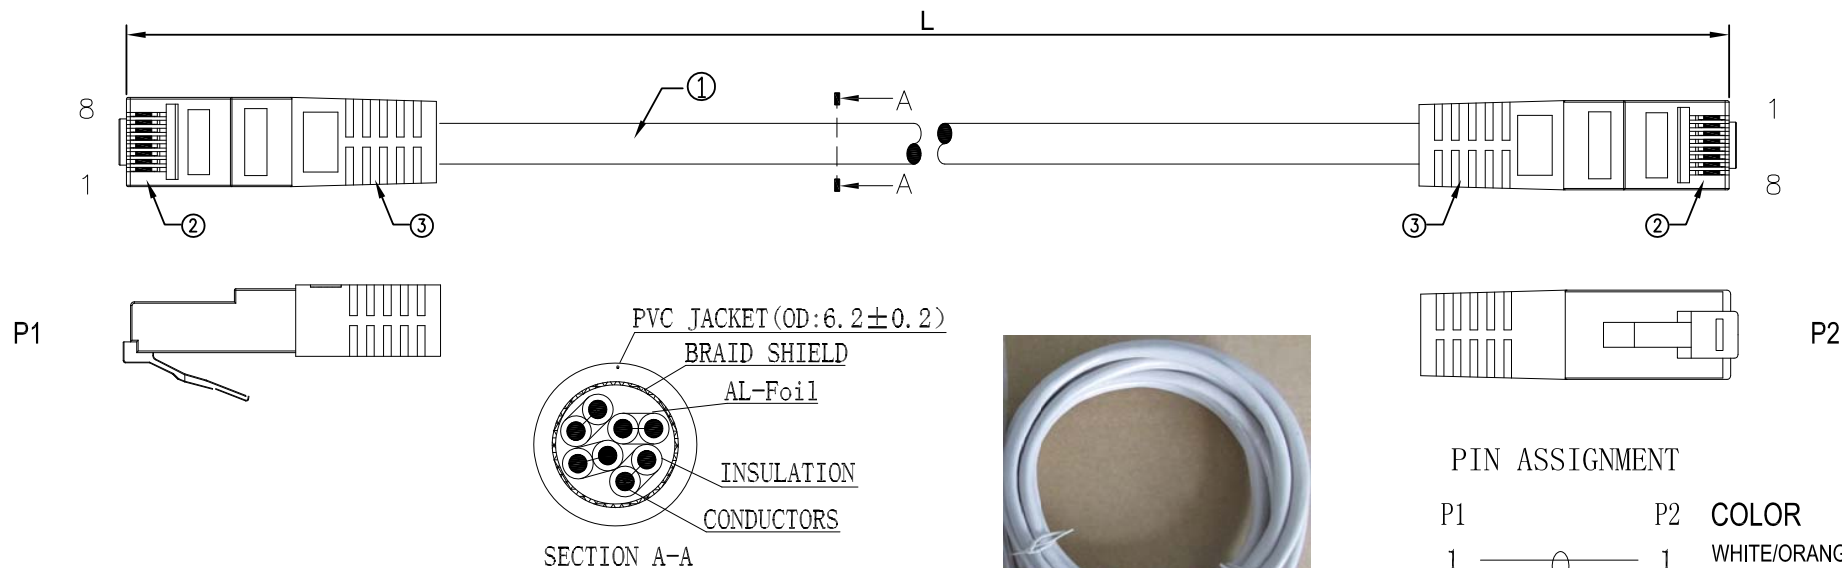


| LC-MODEL            | CUSTOMER MODEL | 长度(L)       |
|---------------------|----------------|-------------|
| N145-01-26CU-0.5    |                | 500±30mm    |
| N145-01-26CU-1.0    |                | 1000±30mm   |
| N145-01-26CU-2.0    |                | 2000±50mm   |
| N145-01-26CU-GR-3.0 |                | 3000±50mm   |
| N145-01-26CU-GR-5.0 |                | 5000±50mm   |
| N145-01-26CU-GR-10  |                | 10000±100mm |
| N145-01-26CU-GR-15  |                | 15000±200mm |

ELECTRONIC TEST:

1. OPEN/SHORT/INTERMITTENCE:100%
2. INSULATION RESISTANCE:10M OHM (MIN)
3. CONDUCTME RESISTANCE:5 OHM MAX

ALL MATERIALS ARE RoHS COMPLIANT

|   |   |   |         |                                                                                                                                                          |  |   |            |                                                                                       |             |                                                                                       |                                     |                  |                   |   |  |
|---|---|---|---------|----------------------------------------------------------------------------------------------------------------------------------------------------------|--|---|------------|---------------------------------------------------------------------------------------|-------------|---------------------------------------------------------------------------------------|-------------------------------------|------------------|-------------------|---|--|
| A | 3 |   | MOLDING | 86000D                                                                                                                                                   |  |   | G          | CUSTOMER:                                                                             |             |  |                                     | DRAWING:         |                   |   |  |
|   | 2 |   | CON     | RJ45 8P8C MALE TYPE, INSULATION CLEAR POLYESTER UL94V-2 GOLD, PLATED CONTACTS G/F,NICKEL PLATED SHELL                                                    |  | 2 | PCS        |  |             |                                                                                       |                                     | LIUJIE 2016-1-29 |                   |   |  |
|   | 1 |   | CABLE   | 26AWG(7/0.16CU*1PR+AL+foil)*4+BRAID(16/5/0.12ALM)PVC JACKET ; CABLE MARKING: CAT 7 SSTP PATCH CABLE 26AWG ISO/IEC 11801 26AWG TIA/EIA 568 ROHS COMPLIANT |  | 1 | PCS        | SCALE: FREE                                                                           |             | CUSTOMER MODEL:                                                                       |                                     | CHECKED:         |                   |   |  |
|   |   |   |         |                                                                                                                                                          |  |   | UNIT: mm   |                                                                                       | APPROED:    |                                                                                       |                                     |                  |                   |   |  |
|   |   |   |         |                                                                                                                                                          |  |   | SHEET: 1/1 |                                                                                       | DRAWING NO. |                                                                                       | PROUCT NAME:                        |                  | franksu 2016-1-29 |   |  |
|   |   |   |         |                                                                                                                                                          |  |   | REV: A     |                                                                                       |             |                                                                                       | CAT 7 SSTP PATCH CORD ,26AWG-COPPER |                  |                   |   |  |
|   |   | 1 |         | 2                                                                                                                                                        |  | 3 |            | 4                                                                                     |             | 5                                                                                     |                                     | 6                |                   | 7 |  |