AA-07FBI

ENTRANCE PANEL



Description

AA-07FBI SILVER multi-apartment metal entrance panel is just perfect for office buildings, apartment complexes, and cottage settlements.

The discussed model incorporates vandal-proof metal mechanical buttons.

Thanks to the additional illumination of the buttons, it will be easier for the user to dial the number of the apartment even at night.

Specifications

Panel type	**Multi-apartment**
Display	**4.3'' TFT, color with backlight**
Keyboard	**Backlight mechanical buttons**
Camera	**1/3"**
Resolution	**2 Mpx**
Camera angle	**110° (horizontal)**
Output video	**Full HD (1920 × 1080), H.264 Main Profile**
Night backlight	**6 LEDs**
Light sensitivity	**0,01 LuX**
Protection class	**IP65**
IK-Code	**IK07**
Working temperature	**-40 — +65 °C**
Power consumption	**6,5 W, in standby — 2,5 W**
Power supply	**+12 V DC and PoE IEEE802.3af**
Body	**Aluminum**
Colors	**Silver**
Dimensions for installation	**140 × 350 × 60 mm**
Size of the pane	**155 × 375 × 55 mm**
Installation	**Flush, surface with BR-AA7 bracket**

Main features

- 4.3'' TFT, color with backlight
- Protection class IP65
- Automatic face recognition
- Working temperature -40 – +65 °C
- Camera resolution 2.0 MP
- Remote add faces
- UKEY mobile access
- Fault alert
- Concierge calling
- Automatic configuration
- Calling the lift to the floor
- Log all events
- Flexible system setup
- Open API

The specifications and appearance of the device may differ from those stated or may change without prior notice.

Functional capabilities


Interface	Multi-language graphical and WEB interface
Lock opening	By means of a monitor Face Recognition Identification By QR code By guest link By Pin By access card By license plates The BAS-IP Intercom app The BAS-IP Link app The BAS-IP UKEY app From API
Identifiers in the panel memory (QR codes, cards, key fobs, UKEY, access codes)	20 000
Face recognition identifications	10 000 faces
Integration with ACS	Wiegand
Built-in Wiegand output for card, key fob, and UKEY identifiers	26, 32, 34, 37, 40, 42, 56, 58, 64, 80 bits
Connection of the additional SH-12 module and its support	Wiegand input: from 6 to 128 bits inclusive Wiegand output for card, key fob, UKEY, QR, Face, Digital code, and all other types of identifiers: from 26 to 128 bits inclusive.
Output for connecting an external induction loop for the hearing impaired	Low-frequency Audio signal 1.2V; 8.2 kOhm.
Type of output for connecting an external induction loop	Socket (female) TRS
Shortcut buttons	Concierge button
Number of call melodies	4 polyphonic melodies, ability to customize melodies for different actions
Authentication	Separate password for settings, WEB – interface and RTSP stream
Additionally	Software Link support, SIP P2P, Built-in relay, Proximity sensor, Open API

Color variations




SILVER

Flush mounting

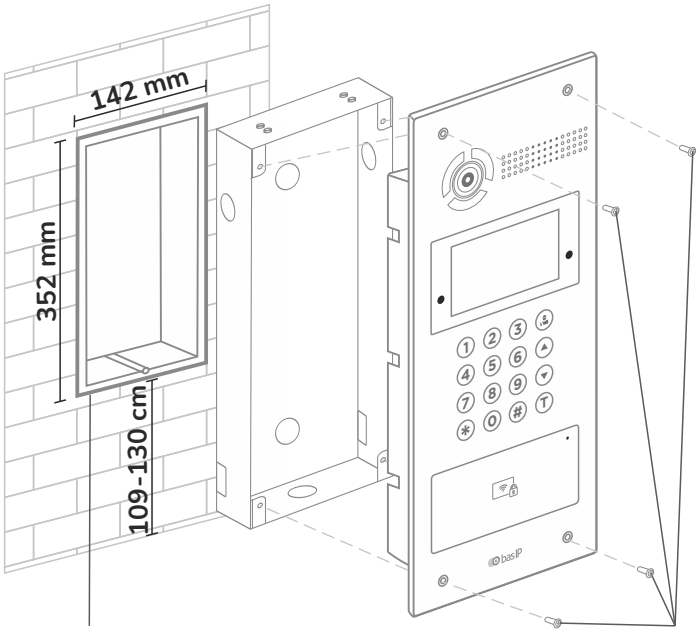

Niche Outdoor Panel Screws

Surface mounting
(with BR-AA7 or BR-AA7C brackets)

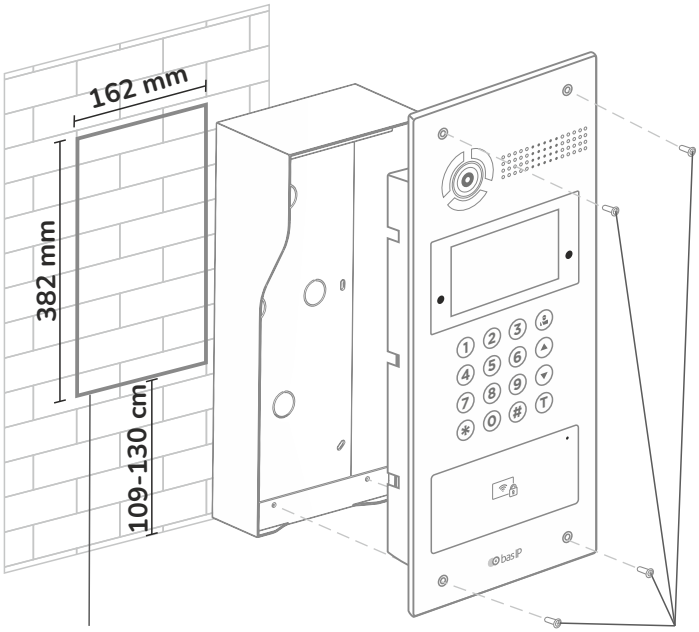

Mounting area Outdoor Panel Screws

Surface Mount Brackets BR-AA7 (standard) and BR-AA7C (all-weather) are not included in the box and must be purchased separately.