

Model Number: CMP-CTSRF Modum Video Panel

Features:



- Access Control (PIN number)
- Name searching through 2.4" OLED display
- Page and call a household unit or a security guard station
- C-MOS(Pin-hole type)




Specifications:

Item	Modum Video Panel
Model	CMP-CTSRF
Installation	Flush Mount Type installation
Wiring	Gateview System (UTP Cable) Household unit monitor (8 wires-common 6 wires+video 2 wires), Security station phone (common 4 wires)
Power Source	DC 12V, 1A
Power Consumption	Standby : 82mA, Maximum : 276mA
Call Method	Handsfree (one way)
Image Sensor	Color CMOS(Pinhole Type)
Horizontal/Vertical	15,735KHz / 60Hz,
Scanning Frequency	15,625KHz / 50Hz
Imaging Angle Horizontal :	62 degrees, Vertical : 46 degrees
Lowest Intensity of Illumination	0.1 Lux (up to 300mm from the camera)
Illumination	0.1 Lux (up to 300mm from the camera)
Effective Call Range	UTP CAT. 5e, 300m
Lighting	Built-in LED light for night use
Temperature	-40°C(tested up to -40°C) ~ 40°C
Dimensions	130 (W) x 249 (H) x 38 (D) mm

Wire:

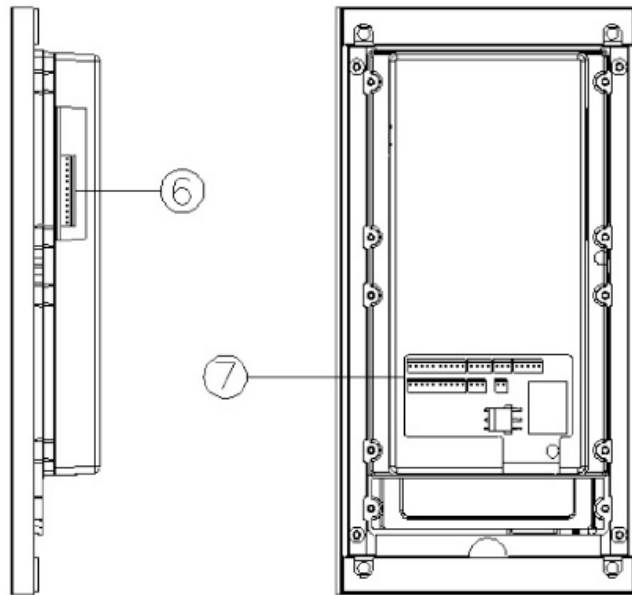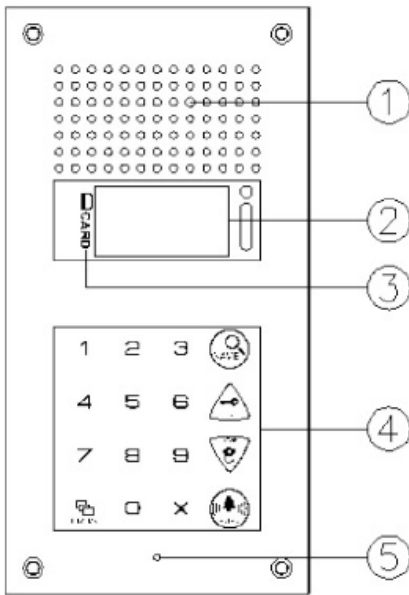

1. Camera
2. OLED Display
3. RFID card receiver
4. Number & Function Button
5. C-MIC
6. Extension Port
7. Wire Connection Port

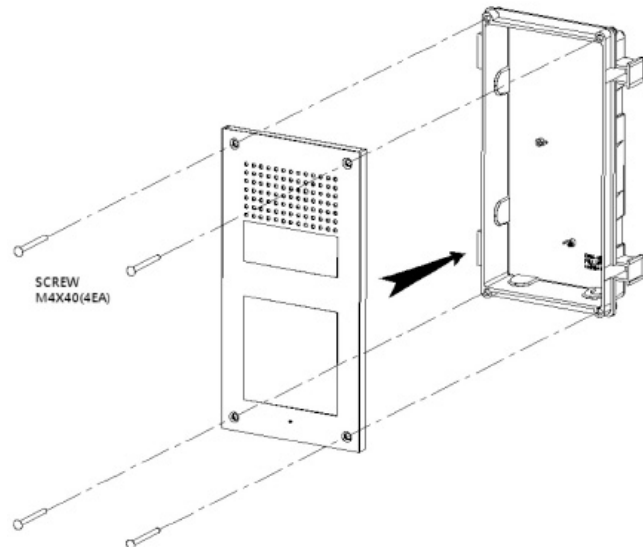

CMP-CTSRF - הוראות הפעלה לחיבורים

פנל גידים CMP-CTSRF כבל רשת

	1. שחור - < ירוק / לבן
	2. חום - < ירוק
	3. אדום - < כחול
	4. כתום - < כחול / לבן
	5. צהוב - < כתום / לבן
	6. ירוק - < כתום
	7. כחול -
	8. סגול -
	9. אפור - < חום / לבן
	10. לבן - < חום

מוניטור גידים - כבל רשת

1. **אדום** - < כתום / לבן
2. **כחול** - < כחול / לבן + כתום + ירוק + חום
3. **צהוב** - < ירוק / לבן
4. לבן - < חום / לבן



שינוי קוד טכנאי

PROGRAM --->4321--->BELL ---> 0 --->BELL--->XXXX --->BELL

שינוי קוד פתיחת דלת

PROGRAM --->4321 --->BELL ---> 1 --->BELL --->XXXX --->BELL

שינוי מספר בנין ופנל

PROGRAM--->4321--->BELL---> 2 --->BELL --->0101 --->BELL

פתיחת דלת הקש פעמון וקוד פתיחה XXXX BELL