

Model Number DRC-40DK
Doorlock Camera**Features:**

- Enter the password using 10 key
- Outdoor model
- Motion detection (PIR)
- 3 way access (PW, RF Card, Videophone)
- Illuminance sensor
- Housecall and talk
- DRC-40DK: Wall-mounted type





[לצפייה באתר לחץ כאן](#)

Specifications:


Item	Doorlock Camera DRC-40DK
Model	DRC-40DK
Power	12VDC/1A (Adaptor) 12VDC (emergency power from monitor)
Communication	Duplex communication
Min. illumination	0.1Lux (up to 300mm from camera / with normal LED operation)
Illumination	White LED equipped (night vision)
Image sensor	CMOS IMAGE SENSOR (0.52 megapixels)
Imaging angle	93° horizontal, 50° vertical, 110° diagonal
Adjustable angle	13° (pan and tilt)
RF Module	13.56MHz
Operation temp.	-10°C (tested up to -40°C) ~ +50°C
Dimension (mm)	DRC-40DK : 127(W)x193(H)x54(D), DRC-41DK : 127(W)x193(H)x63(D) 28 meters (Φ 0.5 UTP), It must be observed
Distance	Resistance under 10 Ω per 100 meters on UTP Cat 5e.

Wire:

1	Camera
2	Microphone
3	White LED & Illuminance sensor
4	Keypad button
5	Back/Cancel button
6	Enter button
7	Speaker
8	Call button
9	RF Card Tag
10	Camera angle adjustment
11	Connecting port/ WIRE for door realese
12	Anti-theft switch

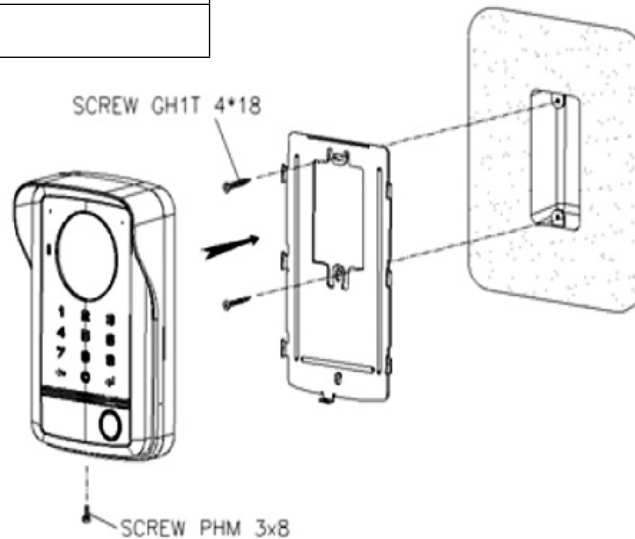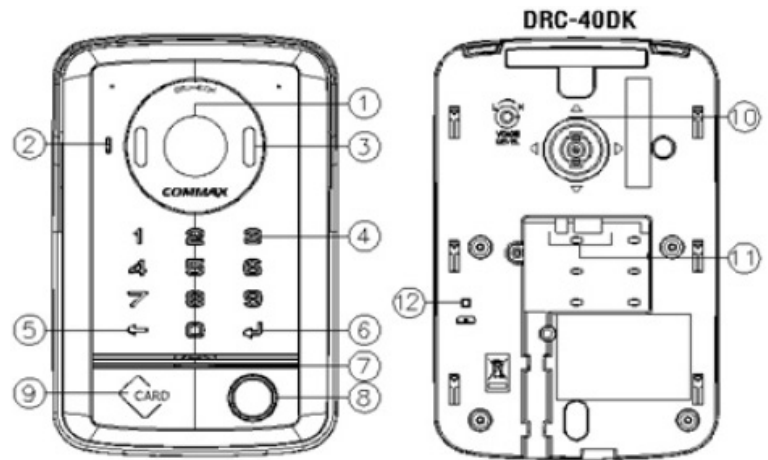

מוניטור (מסר)	מצלמה DRC+4DC COMMAX	
אדום	חום	אודיו
כחול	שחור	GND
צהוב	אדום	V+
לבן	כתום	וידאו

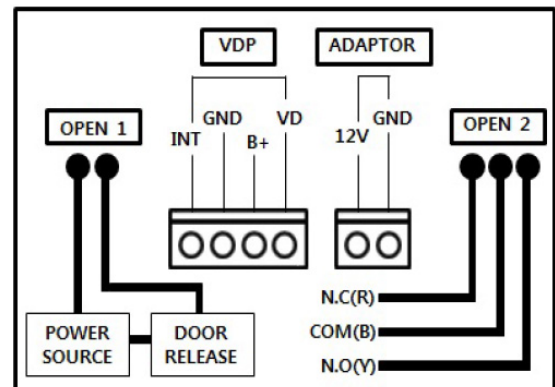

* Precautions

- When wiring the household monitor, connect as follows.
Failure to do the wiring as shown below may cause the video / audio noise.

